



Multi-Grip System

Description and uses

The Acrylicon Multi-Grip System is an industrial mono-colour system which can be elasticised for areas with high thermal and mechanical stresses and outdoor applications. The thickness of the system is 2-4 mm. The system is suitable for car parks, walkways and ramps due to the integral slip resistance. Fibreglass arming can be installed within the system for added protection against movement cracking.

Designed for use in outdoor and indoor areas where the temperature can vary. The elasticity and low temperature flexibility improves the performance in outdoor applications such as exterior parking decks, exterior walk ways (airports and vestibule walk off areas where salt is often used), safety marking zones and mezzanine metal gantries.

Specification

Product	Acrylicon Multi-Grip System - Preparatory work and application in accordance with suppliers instructions.
Finish	Satin
Thickness	2-4 mm
Colour	A wide range of options are available, consult the AcryliCon Solid colour chart for details.
Supplier	AcryliCon Polymers GmbH (Germany).

Key features and benefits



Hard wearing - exceptional resistance to chemicals, abrasion, impact and fire.



1-2 hours cure time - rapid installation and minimum downtime.



Semi-flexible system - ideal for crack bridging and outdoor use in varied temperatures.



Low emissions - our products are solvent-free and contain very low VOC's.



Chemical bond/cure - a truly seamless floor with no cold joints and virtually no risk of delamination.



Slip resistant - our floors exceed minimum safety requirements and can be tailored to each area.



Long lasting - our floors do not degrade or become brittle with use.


To find your nearest AcryliCon office please visit our website:

www.acryliconpolymers.com

 **ACRYLICON**[®]
Quality Resin Solutions

System

Technical Information

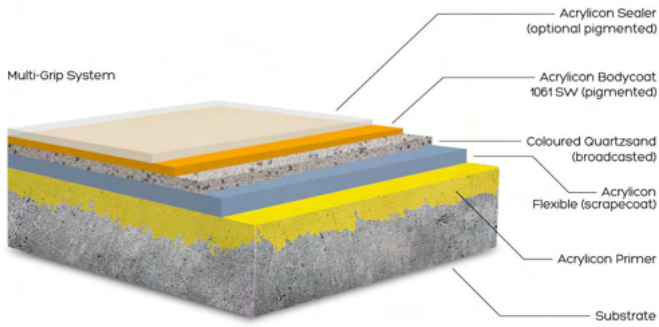

Cleaning and Maintenance

Clean regularly using a mechanical Scrubber/Dryer. Cylindrical machines with a built in vacuum are best suited in combination with a neutral degreaser. Contact your nearest AcryliCon office for advice.

Cure Time

The AcryliCon Multi-Grip System is fully cured within 2 hours after installation and may be put into full use by the customer.

Properties and Application

AcryliCon Primer, AcryliCon Flexible, AcryliCon Bodycoat 1061 SW and AcryliCon Sealer are transparent, solvent-free, medium viscosity and non-toxic when cured. Pigmented AcryliCon Bodycoat 1061 SW is used to obtain tough monocolour floors. AcryliCon Sealer is used as a colourless, wear resistant seal coat. The curing time is about 1 hour at 20°C/68°F (ambient). The lowest application temperature (substrate and material) is 0°C/32°F. AcryliCon can provide solutions for installations at temperatures down to -25°C/-13°F.

Substrate

The concrete strength must not be less than 22.5N/mm² (3250psi). Cores may be required for laboratory testing if any doubt exists. The substrate must be solid, free of dirt, oil, dust and other contaminants that would prevent bonding. It is necessary to protect the substrate from rising moisture and ground water pressure. AcryliCon systems can be applied onto 28 day old concrete at a Relative Humidity of up to 95%.

Should there be any doubt about the moisture in the concrete, an insulated hygrometer is recommended for testing the vapour leaving the substrate. In situations requiring rapid installation, AcryliCon can provide fast cure systems as alternatives to traditional concrete. AcryliCon systems can also bond to other substrates. For further advice please contact your nearest AcryliCon office.

Compressive Strength EN196-1 (DIN1164)	58 N/mm ² / 8,413 psi
---	----------------------------------

Flexural Strength EN 196-1 (DIN1164)	14 N/mm ² / 2,030 psi
---	----------------------------------

Water Permeability DIN / EN 1062-3:2008	<0.001 kg/(m ² .h.0.5)
--	-----------------------------------

Tensile Adhesion Strength DIN / EN 1542:1999	Concrete: >2.0 MPa
--	--------------------

Slip resistance DIN 51130 (German Ramp Method) Dry	R9 - R13 Classification
--	-------------------------

Slip Resistance BS 7976 (TRL Pendulum Test)	Dry: 66 Wet: 57
--	--------------------

Temperature Resistance	Tolerant of sustained temperatures up to 60°C/140°F
---------------------------	--

Abrasion Resistance EN ISO 5470-1 (Taber)	<1000 mg (average mass loss)
--	------------------------------

Chemical Resistance EN13529	Excellent
--------------------------------	-----------

Fire Class EN 13501-1	Bfl - s1
--------------------------	----------

The technical properties of the AcryliCon system are evaluated to EN or ISO standards and the results are average values, delivered under proper installation procedures and recommended conditions.

Life Expectancy

In excess of 20 years, subject to correct installation conditions and substrate preparation. Life expectancy is generally influenced by the use of the system and maintenance regime.

Disclaimer

This information and all further technical advice is based on intensive research and many years experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make technical alterations during the course of further development. The customer is not released from the obligation of checking our data and recommendations for the suitability of their own particular application. Performance of the product described herein should be verified by testing, which we recommend be carried out only by qualified experts and is the sole responsibility of the customer.



This product has been manufactured under the controls established by a Bureau Veritas Certification approved management system that conforms with EN1504-2, ISO 9001:2015 and ISO 14001:2015.

To find your nearest AcryliCon office please visit our website:

www.acryliconpolymers.com

 **ACRYLI CON**[®]
Quality Resin Solutions